

**CASIO®**


---

***Training Course***


# **CASIO Active Menu**

---

# Desktop Comparison

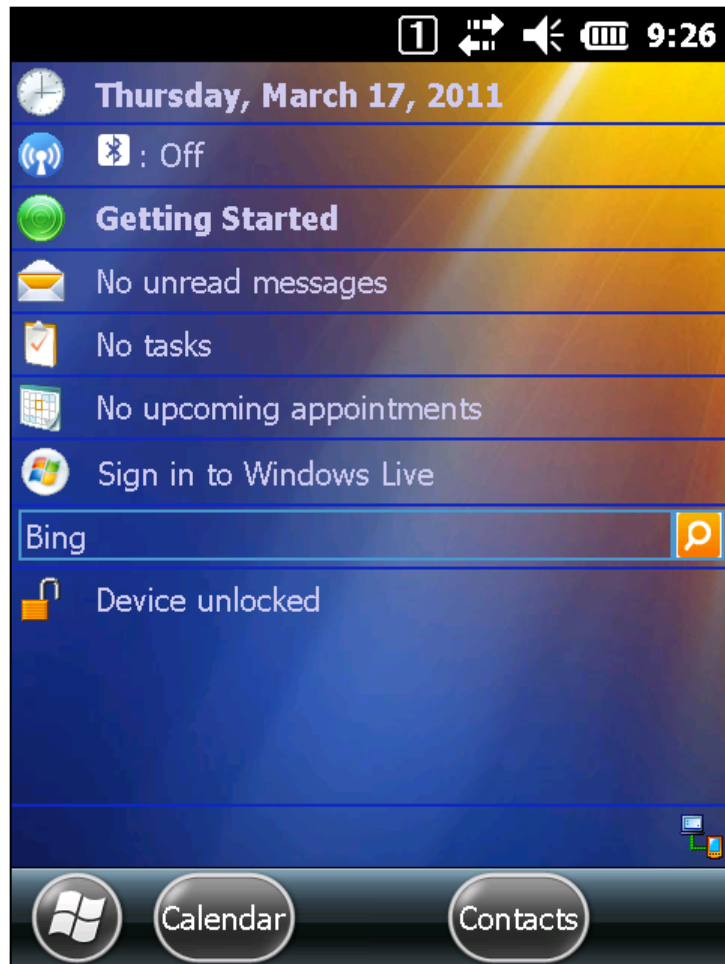

**Standard Desktop Mode**

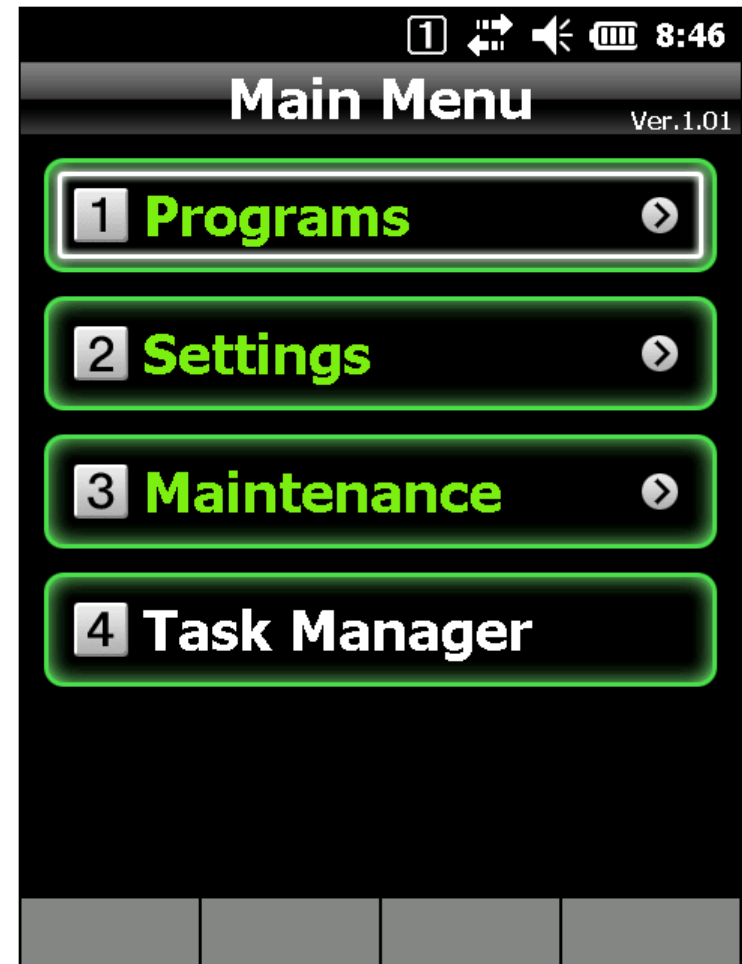


**CASIO Desktop Mode (Kiosk)**

# Window Layers



Active Menu consists of menu windows and background window.



# Terminal Password

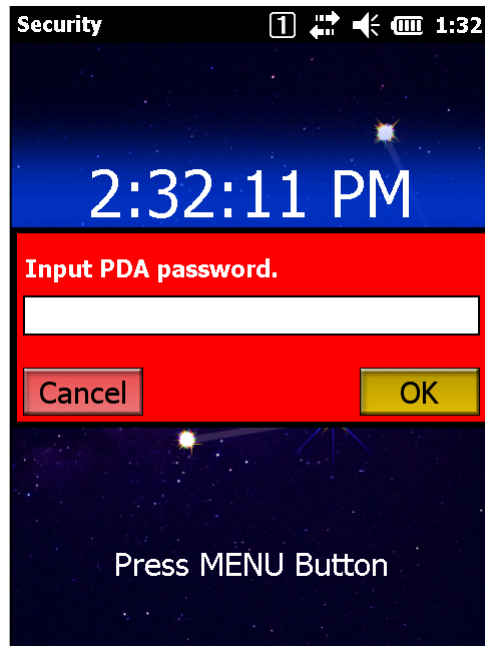

CASIO Background Window

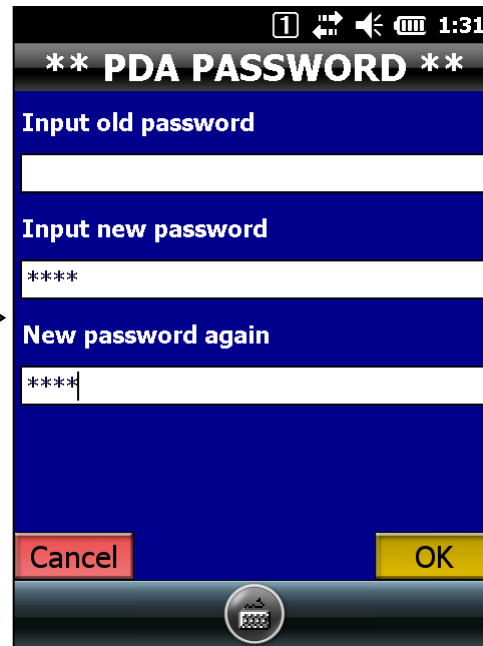

Settings Dialog

**Two Menu Windows:**

- Main Menu
- System Menu (Admin)

**Specify global password to protect the System Menu.**

**Set the password from System Menu at:**

**=> [ 3. Maintenance ]**

**=> [ 8. PDA Password ]**


**Leave the fields for new password blank to delete old password.**

**Call ActiveMenuSwitcher.exe at \Program Files\CASIO\ActiveMenu to move from Main Menu to System Menu.**




**Terminal password can neither be copied from one device to the other nor deleted by full reset operation.**

# Configuration

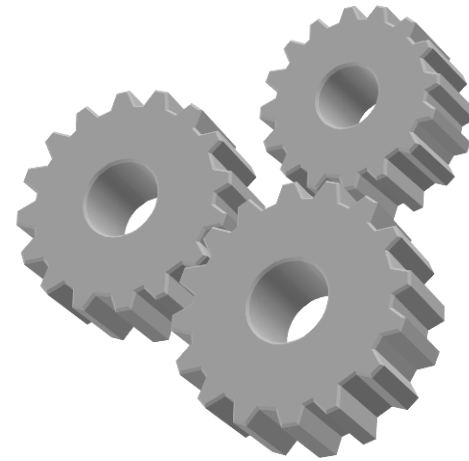

# Menu Definition File

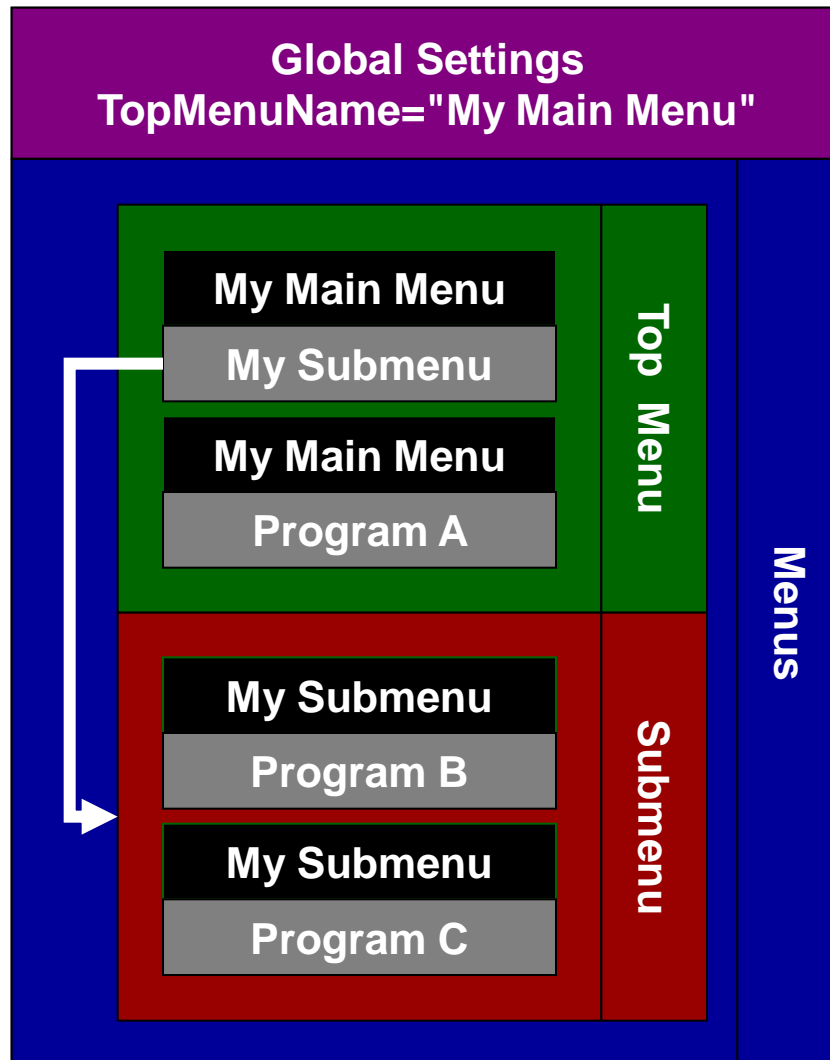

Menus are described in the files

- JobMenu.xml (Main Menu) and
- SystemMenu.xml (System Menu)



at \Program Files\CASIO\ActiveMenu\ENV\INI.

Top-level menu must be specified in global settings section as "TopMenuName".

A menu consists of all entries belonging to the same menu name. Up to 9 entries per menu can refer to submenus or programs.

A submenu can be related to the main menu or another submenu. Up to 5 menu layers can be specified.

# Top-level Main Menu

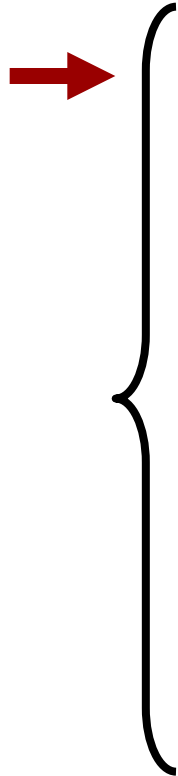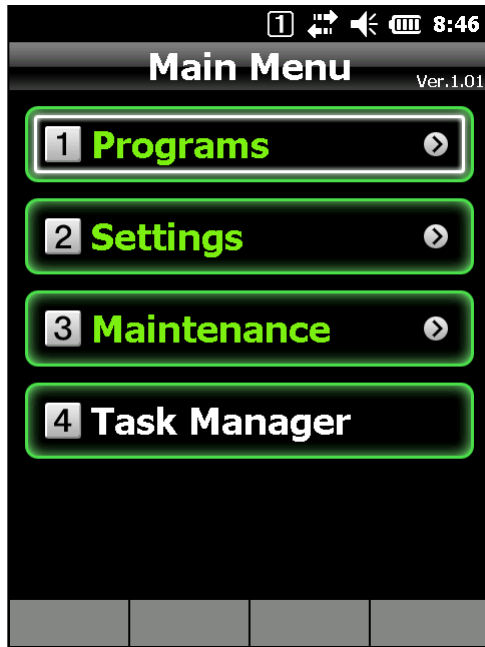


```
< ... TopMenuName="MainMenu" />  
...  
<Menu>  
...  
</Menu>  
<Menu>  
...  
</Menu>  
<Menu>  
...  
</Menu>
```



Create main menu by specifying TopMenuName and adding submenu & program entries to it.



# Submenu Entry

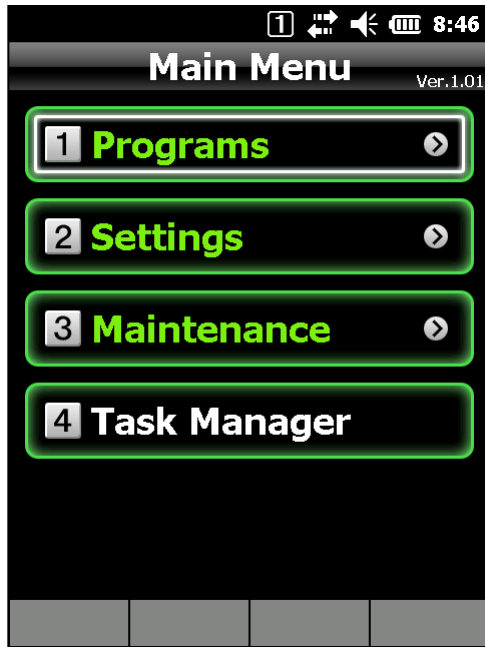

```
<Menu>
  <MenuName>Main Menu</MenuName>
  <BtnTitle>Programs</BtnTitle>
  ...
  <Command>menu</Command>
  <ExePath>Programs</ExePath>
  ...
</Menu>
```



Create submenu entry by specifying "menu" command and pointing "ExePath" to name of submenu.

# Program Entry




```
<Menu>
  <MenuName>Programs</MenuName>
  <BtnTitle>Internet Explorer</BtnTitle>
  ...
  <Command>exec</Command>
  <ExePath>\windows\iexplore.exe</ExePath>
  <ExeOption>http://www.casio.eu</ExeOption>
  <Plugin></Plugin>
  ...
</Menu>
```



Create program entry by specifying "exec" command and pointing "ExePath" to full path of application.


# Authentication

User:  
Guest  
Password:  
\*\*\*\*

Cancel  Check




```
<Menu>  
  <MenuName>Programs</MenuName>  
  <BtnTitle>Internet Explorer</BtnTitle>  
  ...  
  <Command>exec</Command>  
  <ExePath>\windows\iexplore.exe</ExePath>  
  <ExeOption>http://www.casio.eu</ExeOption>  
  <Plugin>\program files\security.exe</Plugin>  
  ...  
</Menu>
```



You can specify your own application as plug-in to check user permission (return values: 1 = access allowed; 0 = access denied).

# Internationalization

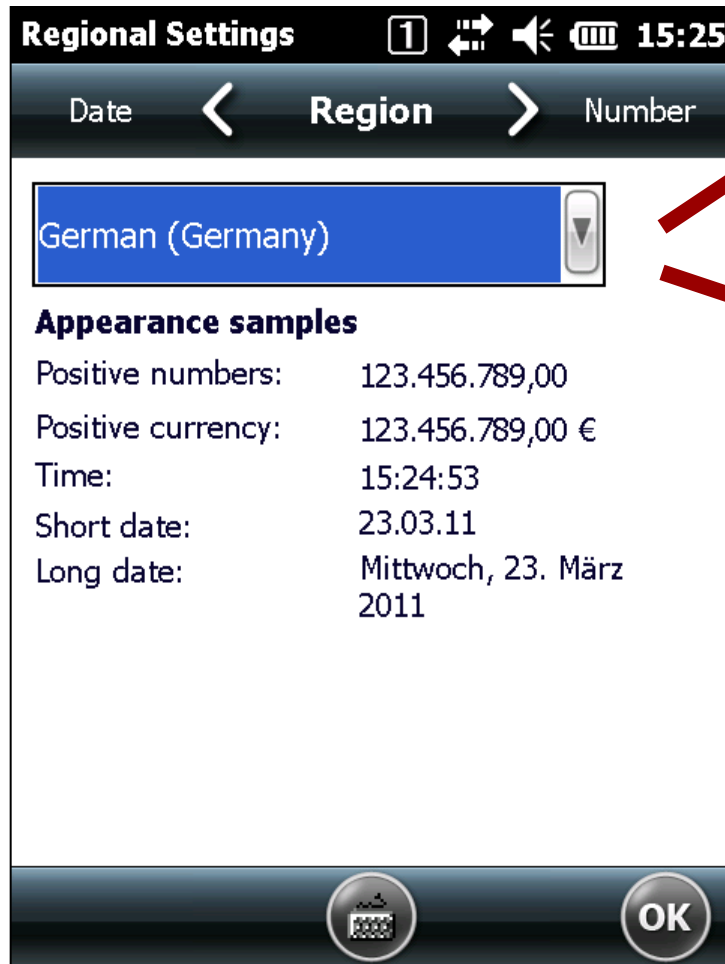

Culture	ISO Name
French (France)	fr-FR
German (Germany)	de-DE
German (Switzerland)	de-CH
Italian (Italy)	it-IT
Spanish (Spain)	es-ES
...	...

## Examples:

- SystemMenu.fr-FR.xml
- Waitnet.de-DE.png
- ...

If there is no file for selected region, default file will be loaded instead.

# Options



## **WLAN Connection Wait (WAITLANCONNECTTIME)**

**Specify the time to wait until the main menu is activated after either reset operation or switching power on: 0 - 300 seconds, where 0 means disabled (default).**



## **Virtual-off Mode (FAKEOFFMODE)**

**Use the power button to set the device into power-save mode instead of switching it off, e.g. to keep WLAN connected: 0 = disabled (default), 1 = enabled.**



## **Auto Reset (ONEDAYRESET)**

**Let the device perform a soft reset operation when it is switched on after a certain time: time (24H, e.g. 15:00), where no setting means disabled (default).**

**(Options are described in the file Option.ini at \Program Files\CASIO\ActiveMenu\ENV\INI)**

## **Questions & Answers**